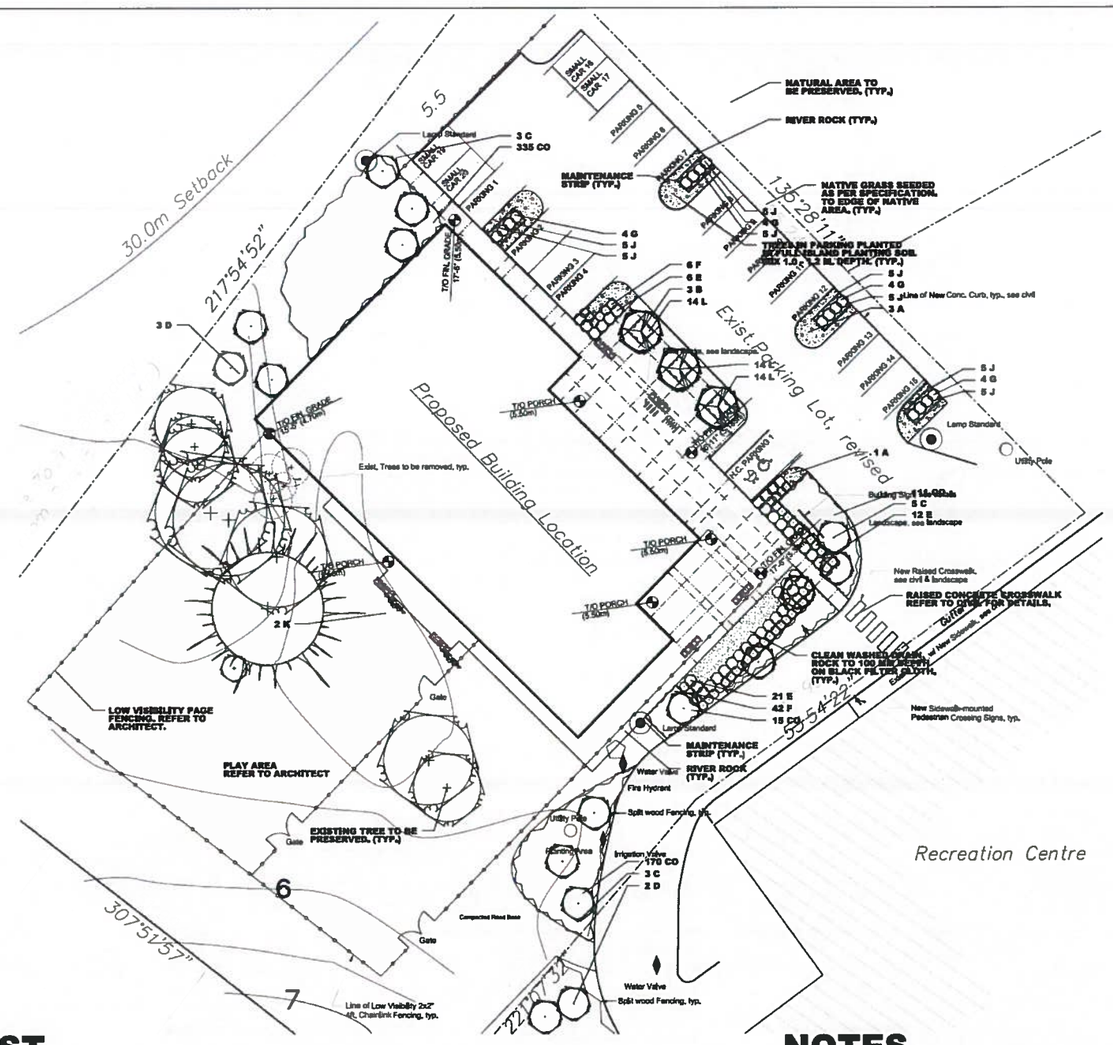

PLANT LIST

KEY	QTY	BOTANICAL NAME	COMMON NAME	SIZE	ROOTS	COMMENTS
A	4	ACER CIRCINATUM	VINE MAPLE	2.5 - 3.0 M HT.	B & B	MULTI STEM, 3 - 5 STEMS, UPRIGHT, FULL
B	3	RIBES SANGUINEUM 'KING EDWARD'	RED FLOWERING CURRANT	3.0 M HT	B & B	MULTI-STEM, FULL
C	11	RIBES SANGUINEUM 'WHITE ICICLE'	WHITE ICICLE FLOWERING CURRANT	1.75 M HT.	B & B	FULL
D	8	QUERCUS GARRYANA	GARRY OAK	5.0 CM CAL., 3.5-4.5 M HT.	B & B	1.5 M STANDARD, FULL
E	39	MAHONIA AQUIFOLIUM	OREGON GRAPE	45 CM HT.	27 CM POT	FULL
F	46	POTENTILLA FRUTICOSA 'PINK WHISPER'	PINK WHISPER POTENTILLA	30 CM HT.	21 CM POT	FULL
G	22	ROSA WOODSII	WOODS ROSE	40 CM HT.	21 CM POT	FULL
J	46	ARCTOSTAPHYLLUS URVA URSI	KINNIKINNICK	30 CM SPREAD	15 CM POT	MIN. 3 LEADERS, PLANT 45 CM O.C.
K	2	LONICERA X BROWNII 'DROPMORE SCARLET'	SCARLET TRUMPET HONEYSUCKLE	1.0 M HT.	21 CM POT	FULL, MIN. 3 LEADERS, STAKED
L	42	GAULTHERIA PROCUMBENS	WINTERGREEN	30 CM SPREAD	15 CM POT	FULL, PLANT 30 CM O.C.
CO	582	CAREX OBNUPTA	SLOUGH GRASS	20 CM HT.	15 CM POT	FULL, PLANT 60 CM O.C.

NOTE: PLANTS MUST MEET SIZE AND POT SPECIFICATION AND MAY EXCEED BCLNA STANDARDS.
AREA OF PLANT MATERIAL SOURCING TO INCLUDE WESTERN NORTH AMERICA.

NOTES

- CONTRACTOR TO REPORT ALL ERRORS, OMISSIONS AND DISCREPANCIES TO LANDSCAPE ARCHITECT IMMEDIATELY AND PRIOR TO COMMENCEMENT OF WORK.
- CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE LOCATION OF ALL UNDERGROUND SERVICES AND ANY DAMAGE TO SAME CAUSED BY HIS WORK.
- CONTRACTOR TO ENSURE SMOOTH CONTINUOUS POSITIVE DRAINAGE AWAY FROM BUILDING TO ALL DRAINAGE PICKUP POINTS.
- AREAS DESIGNATED AS RIVER ROCK TO HAVE 150 MM TO 200 MM CLEAN WASHED RIVER ROCK TO LANDSCAPE ARCHITECT APPROVAL, TO A DEPTH OF 300 MM PLACED ON BLACK FILTER CLOTH.
- WHERE PLANTING BEDS ABUT LAWN OR WILDFLOWER AREA INSTALL MAINTENANCE STRIP - 2 X 4 PRESSURE TREATED FIR EDGER, STAKED WITH 2 X 4 X 45CM. PRESSURE TREATED FIR STAKES. STAKE 1.2 M. O.C. AND AT ALL JOINTS AND ENDS. TOP OF STAKE TO BE 2.5CM. BELOW TOP OF EDGER.
- BARK MULCH TO BE PLACED TO 75 MM DEPTH AFTER SETTLEMENT IN ALL PLANTING BEDS AND PLANTED AREAS.
- ALL PLANTING AREAS TO BE IRRIGATED WITH A FULLY AUTOMATIC UNDERGROUND IRRIGATION SYSTEM TO BASIC STANDARDS & ADHERING TO DISTRICT OF SAANICH IRRIGATION SPECIFICATIONS, TO SAANICH APPROVAL. COORDINATE IRRIGATION SLEEVES WITH GENERAL CONTRACTOR.
- ALL LAWN AREAS TO BE SODDED.
- ALL LANDSCAPE WORK ON CITY PROPERTY TO DISTRICT OF SAANICH STANDARD AND APPROVAL.
- REFER TO ARCHITECTURAL/CIVIL FOR HARD LANDSCAPE & SITE GRADING.

No.	Date	Revision
9	Dec. 02,20.	Fencing General
8	Jan. 31,18.	Building
7	Oct. 05,17.	Re-Issued for Building Permit
6	Sept. 08,17.	Issued for Tender
5	June. 05,17.	Cross walk
4	Feb. 17,17.	Additional Planning Comments
3	Feb. 17,17.	Planning Comments
2	Nov. 15,16.	Issued for DPRP
1	3rd June 16	Revised elevations for review

The computer generated drawing is an instrument of service and is copyright reserved. Use only for this project or as directed by Iredale Group.

IREDALE GROUP
ARCHITECTURE
202 - ONE ALEXANDER ST
VANCOUVER BC V6A 1B2
t: 736-5581 f: 736-6585
architect@iredale.ca
www.iredale.ca

BRITISH COLUMBIA SOCIETY OF LANDSCAPE ARCHITECTS
REGISTERED MEMBER
JAMES PARTLOW
122

Consultant

Lombard North Group
LOMBARD NORTH GROUP (BC) INC.

SAANICH NEIGHBOURHOOD PLACE
TILLICUM EARLY YEARS CENTRE

3100 TILLICUM ROAD
VICTORIA BC

Drawing title
LANDSCAPE PLAN

Scale & Grid
1 : 250

Drawn by	Checked	Checked
SP	JP	JP

Project No.
15100

Drawing No. L1.0

RECEIVED
DEC 03 2020
PLANNING DEPT.
DISTRICT OF SAANICH